
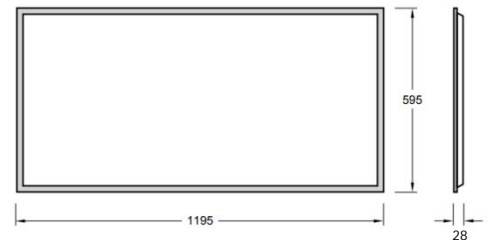



TECHNICAL SHEET

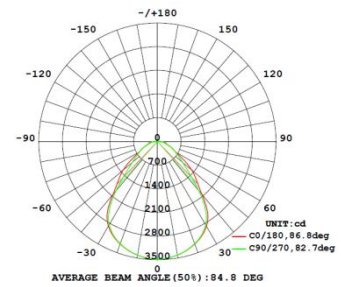

Brand/Model	WF-PL-6012-BL-60S
Country of Origin	P.R.C
Description	595 × 1195mm new generation screwless low profile backlit LED panel (H: <28mm) sheet steel housing in durable epoxy powder-coated white finish, high efficiency prismatic diffuser (UGR<19), 60W, super slim, high brightness LED light bar (7,200lm), remote flicker-free, non-dimmable LED driver
Materials	High efficiency prismatic diffuser (UGR<19), White finish
Compliance	CB
Protection Classification	IP54
Lamp	60W LED Lumen: > 7,200lm CRI: >80 Colour Temperature: 4000K /6500K Lifespan: 50,000hours Beam angle: 90D Luminaire Efficacy: 120lm/w
Control Gear	Remote Flicker free Non Dim LED Driver
Mounting Method	Recessed Mounted
Dimension	595 X 1195 X 28mm (Length X Width X Height)