

TECHNICAL SHEET





Mounting (optional)

Bracket



Safety Ropes

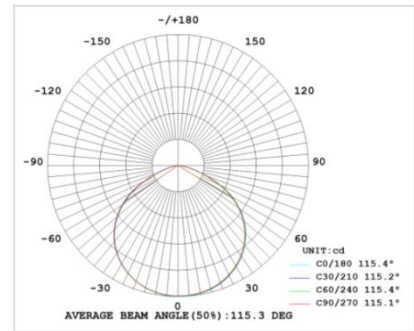

Key Features

- ◊ Efficacy: up to 190lm/w & 160lm/w
- ◊ LUMILEDS led chip, SDCM<5.
- ◊ Non-isolated led driver, conversion efficiency up to 94%.
- ◊ Comes with breathe plug for better heat dissipation.
- ◊ Beam Angle(optional): 60°/90°/120° PC lens.
- ◊ Controls and Dimming(optional): 1-10V Dimming/Motion Sensor & Daylight Sensor/Zigbee Wireless Control.
- ◊ Certificate: CE, RoHS.

Wattage	50W	100W	150W	200W
Lumen Output	8,000 lm/9,500 lm	16,000 lm/19,000 lm	24,000 lm/28,500 lm	32,000 lm/38,000 lm
Beam Angle	120 degree	60/90/120 degree		
Luminous Efficacy	160 lm/w & 190 lm/w			

Brand/Model	High bay 150W
Country of Origin	P.R.C
Description	150W IP66/IK08 CRI80 (24,000lm) LED Highbay Luminaire Housing made of ADC12 High Pressure Die-Cast Aluminium construction in UV & Corrosion Resistance Electrostatic Thermopainted finish in black. With 10m Cable & Chain.
Materials	Die-Cast Aluminium body, Black finish
Compliance	CE
Protection Classification	IP65 IK08
Lamp	150W LUMILEDS LED Lumen: >24,000lm CRI: >80 Colour Temperature: 5000k/5700k/6500K Lifespan: 100,000hours Beam angle:60D/90D/120D Luminaire Efficacy: 160lm/w
Control Gear	Integrated Non Dim LED Driver
Mounting Method	Surface Mounted
Dimension	300 X 152mm(Diameter x Height)