



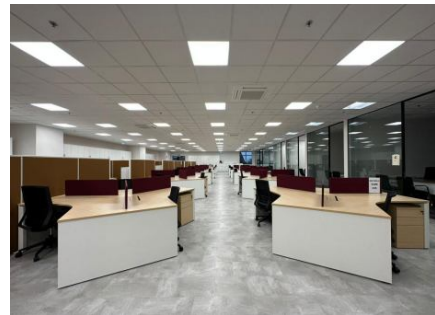


# TECHNICAL SHEET

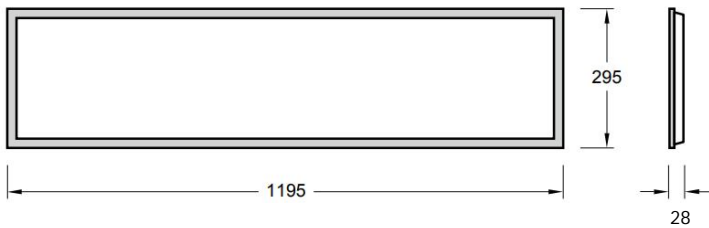

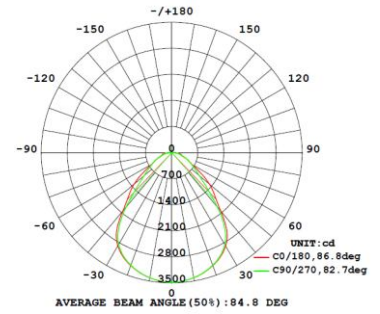



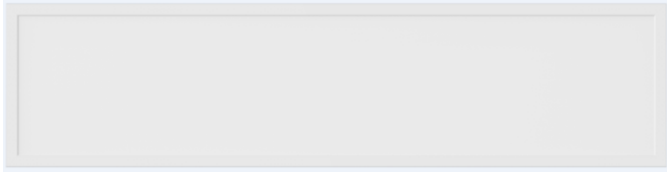

<b>Brand/Model</b>	<b>WF-PL-30120-BL-36S</b>
<b>Country of Origin</b>	P.R.C
<b>Description</b>	295mm×1195mm new generation screwless low profile backlit LED panel (H: <28mm) sheet steel housing in durable epoxy powder-coated white finish, high efficiency prismatic diffuser (UGR<19), 36W, super slim, high brightness LED light bar (4,320lm), remote flicker-free, non-dimmable LED driver
<b>Materials</b>	High efficiency prismatic diffuser (UGR<19), White finish
<b>Compliance</b>	CB
<b>Protection Classification</b>	IP54
<b>Lamp</b>	36W LED Lumen: > 4,320Lm CRI: >80 Colour Temperature: 4000K /6500K Lifespan: 50,000hours Beam angle: 90D Luminaire Efficacy: 120lm/w
<b>Control Gear</b>	Remote Flicker free Non Dim LED Driver
<b>Mounting Method</b>	Recessed Mounted
<b>Dimension</b>	295 X 1195 X 28mm (Length X Width X Height)